

MISTING



ALBUZ catalog 2024

NEW
Nozzle

Full cone 1/8
misting nozzle

TAM




SPECIFIC CHARACTERISTICS

- › TAM misting nozzles are suitable for pressures from 5 to 30 bars included
- › Easy assembly and cleaning
- › Removable filter made of sintered resin (50 µm).
- › Sealing materials: nitrile

MAIN CHARACTERISTICS

- › High-performance ceramics and plastic POM body - Polyacetal (Excellent precision and high wear resistance)
- › Recommended for several applications such as humidification, fine particles reduction, odour control.
- › 1/8 NPT thread

SECTIONAL VIEW

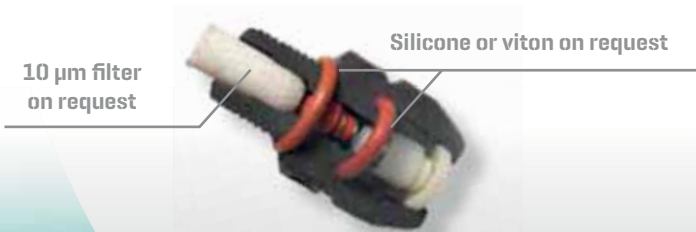

APPLICATIONS

Particularly recommended to refresh people and animals. Tender fruits and vegetables cleaning

Pression (bar)	YELLOW TAM		BLACK TAM		BLUE TAM		RED TAM		GREY TAM		GREEN TAM		ORANGE TAM	
	Flow rate (ml/min)	Angle	Flow rate	Angle	Flow rate	Angle	Flow rate	Angle	Flow rate	Angle	Flow rate	Angle	Flow rate	Angle
5	-	-	-	-	22	35°	41	55°	-	-	78	55°	137	65°
8	20	30°	25	56°	31	57°	53	67°	68	77°	118	80°	185	80°
10	23	47°	29	62°	35	65°	60	75°	78	80°	137	90°	214	83°
12	26	55°	33	64°	39	67°	66	75°	87	85°	153	94°	238	90°
15	29	60°	37	70°	44	70°	74	78°	99	89°	176	94°	269	91°
18	33	65°	42	75°	49	73°	80	80°	109	91°	194	94°	298	92°
20	35	68°	44	75°	52	77°	84	80°	116	91°	206	94°	317	92°
25	40	72°	51	75°	59	77°	94	82°	130	92°	234	94°	359	94°
30	44	76°	56	75°	65	77°	102	85°	142	92°	257	94°	394	96°



5-30 bar